







Stop wasting food

Keep your products frozen or part-baked and make them fresh when your clients place the order or reheat them without compromising the quality

Prática's high-speed oven models fit small, medium, and large businesses

Increase the range of products you offer to your customers

Secures consistent results under continuous repetitive operation

Easy operation Start cooking with just two touches

When your customers need something fast and easy to eat

Quality food Good food at a fraction of the time




Contact us and schedule a demo!


214 584 6269





Prática Products | inf praticausa | inf praticaus

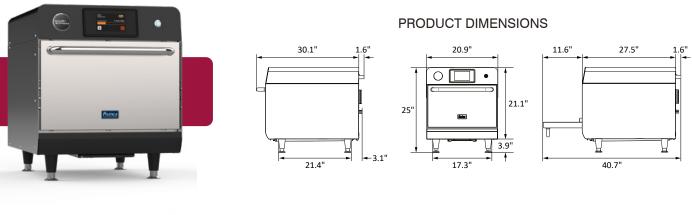

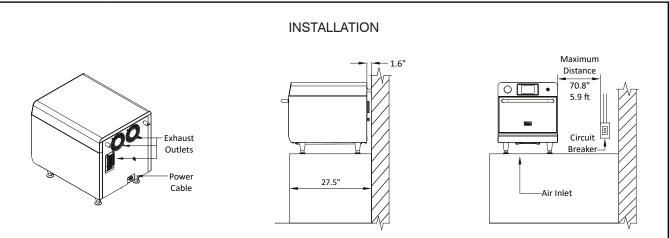

ELECTRICAL SPECIFICATIONS

Ensure that the electrical configuration of the building is in accordance with the technical specifications located on the serial plate located on the back panel of the unit.

The outlet should be located no more than 70.8"/5.9ft away from the unit.

This plug must be connected to a properly installed and grounded outlet.

In case of a short circuit, the unit's ground connection reduces the risk of electrical shock.

The customer is responsible for the electrical conditions at the installation site.

GENERAL INSTRUCTIONS

The oven should be placed on a base or countertop capable of supporting the unit's weight (approximately 194 lbs. / 88 kg).

For proper ventilation, a minimum space of 1.6" between the back of the oven and the wall is required. The bumper, located at the back of the oven, has been designed to provide this necessary space and cannot be removed.

Do not block the air inlets and exhaust outlets located on the rear and underneath the oven.

It is not recommended for the unit to be positioned near stoves, deep fryers, hot plates and other equipment that releases fat, fumes and heat.

The oven must be installed at a leveled and ventilated location.

Improper installation may void the equipment warranty.

DIMENSIONS

Rocket Express	Product Dimensions					Boxed Product Dimensions				
	Height Width		Depth		Weight	Height Width		Depth	Weight	
	25"	20.9"	31.7	11	194lbs 88kg	34"	25.2"	36.2"	250lb 113.4kg	
Chamber Dimensions	Capacity		Height		Wi	dth	Depth			
	0.74 cu.ft 21L		5.7"		15.5"		14.2"			
Clearance	Left Side			Back				Right Side		
	O"			0"				0"		

	Region	Voltage (V)	Phases	Freq. (Hz)	Power (kW)	*Circuit Breaker (A)	Cable	Socket				
	USA	208	Single	60	6.2	30	3x10AWG	NEMA	•			
USA	240	Single	60	7.2	30	3X TUAVVG	6-30	$\overline{}$				
	*Prática recommends installing a type D circuit breaker whilst remaining in accordance with local regulations.											









